



Crosse Architek : en aluminium, Ø 89 mm

Fixation du luminaire par rotule

Fixation coiffante de la crosse sur le mât


Finition : thermolaquage par poudrage polyester, couleur au choix

Mât : acier cylindro-conique spécifique, Ø 110 mm avec embout réducteur Ø 90 x 110 mm


Hauteurs : 6,5 m, 7,5 m, 8,5 m et 9,5 m

ARCHITEK	A mm	B mm	C mm	D mm	Inclinaison degrés	Poids kg	SCx m ²
Simple feu	600	330	-	-	20	6	0,14
	900	365	-	-	15	10	0,18
	1300	365	-	-	10	11	0,21
	1800	360	-	-	10	13	0,27
Double feu	600	300	1200	-	10	13	0,19
	900	365	1800	-	10	15	0,29
	1300	365	2600	-	10	18	0,37
Applique murale	285	135	-	220	0	2,1	0,03
	860	410	-	465	20	6,1	0,18
Contre-feu*	400	130	-	200	10	2,3	0,06


* Demande d'étude obligatoire

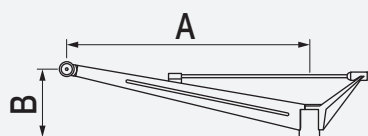


crosse Architek simple feu



applique murale Architek

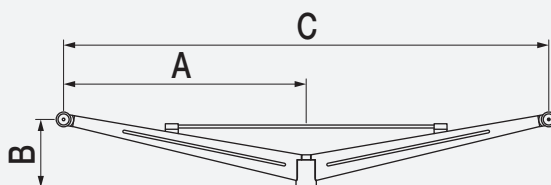

crosse Architek double feu



*contre-feu Architek **



Chorus Architek



Elipt Architek



Tsana Architek



Tsana X Architek



Metro Architek



LED Luminaires

Modern Streetfurniture

Waste bins

Bollards Light

tree grill

Bollards

Classic poles cast iron

Steel poles

MODERN POLES CAST IRON

Defence bollards

Drinkwater fountain

SEATING

TRAMWAY POLES

Modern LED luminaires

Classic luminaires

Classic street furniture

Ghm

Rue Antoine Durenne
52220 Sommevoire
France
Tel nr. 0033 3 25 55 23 03

ECLATEC

41 rue Lafayette
54320 Maxeville
France
Tel nr. 0033 3 83 39 38 28

Export internet : www.ghm-eclatec.com

Email export: info@ghm-eclatec.com