



Crosse KC : en acier, Ø 60 mm


Fixation du luminaire en coiffant ou pénétrant standard Eclatec (cf p.132)

Fixation pénétrante de la crosse sur le mât


Finition : thermolaquage par poudrage polyester, couleur au choix

Mât : acier cylindro-conique Ø 60/62 mm


KC	A mm	B mm	C mm	D mm	Inclinaison degrés	Poids kg	SCx m ²
Simple feu	500	385	-	-	15	5,8	0,06
	1000	350	-	-	15	6,5	0,07
	1300	470	-	-	15	7,5	0,08
	1500	530	-	-	15	8,5	0,08
Double feu	500	250	1000	-	15	10	0,12
	1000	380	2000	-	15	10,5	0,13
Applique murale	500	215	-	270	10	5,6	0,06
Contre-feu	500	215	-	270	10	5,6	0,06

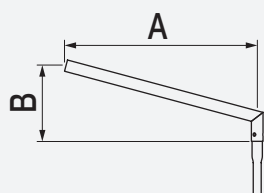


crosse KC simple feu

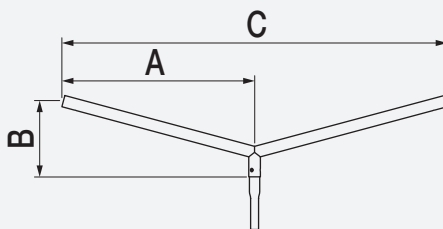

crosse KC double feu

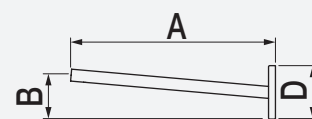

applique murale KC



contre-feu KC



Tilt T KC



Moana KC



Tweet KC



Pixel KC



Tsana KC



Tsana X KC



Enza KC



Ixis KC



Indice Graphic KC



Murena KC

LED Luminaires

Modern Streetfurniture

Waste bins

Bollards Light

tree grill

Bollards

Classic poles cast iron

Steel poles

MODERN POLES CAST IRON

Defence bollards

Drinkwater fountain

SEATING

TRAMWAY POLES

Modern LED luminaires

Classic luminaires

Classic street furniture

Ghm

Rue Antoine Durenne
52220 Sommevoire
France
Tel nr. 0033 3 25 55 23 03

ECLATEC

41 rue Lafayette
54320 Maxeville
France
Tel nr. 0033 3 83 39 38 28

Export internet : www.ghm-eclatec.com

Email export: info@ghm-eclatec.com