



Crosse Laslo : en acier, Ø 60 mm


Fixation du luminaire en coiffant ou pénétrant standard Eclatec (cf p.132)

Fixation pénétrante de la crosse dans le mât


Finition : thermolaquage par poudrage polyester, couleur au choix

Mât : acier cylindro-conique Ø 60/62 mm


LASLO	A mm	B mm	C mm	D mm	Inclinaison degrès	Poids kg	SCx m ²
Simple feu	800	500	-	-	5	8,5	0,08
	1000	500	-	-	5	9,5	0,16
	1500	500	-	-	5	11,5	0,21
Double feu	800	500	1600	-	5	10,5	0,17
	1000	500	2000	-	5	12,3	0,68
	1500	500	3000	-	5	17	0,28
Applique murale	800	200	-	320	5	5	0,08
	1000	230	-	340	5	6	0,16
	1500	330	-	380	5	9	0,21
Contre-feu	800	200	-	320	5	5	0,08
	1000	230	-	340	5	6	0,16
	1500	330	-	380	5	9	0,21

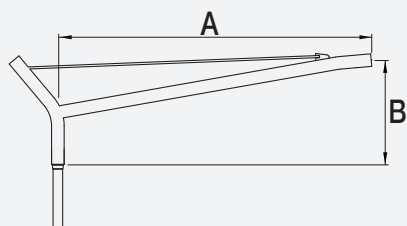

crosse Laslo simple feu

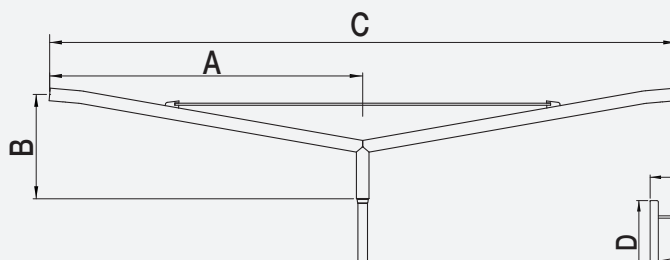

crosse Laslo double feu

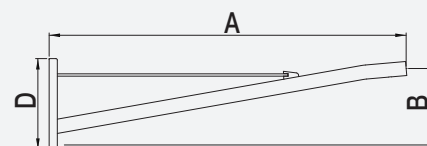

applique murale / contre-feu Laslo



Murena Laslo



Moana Laslo



Elipt Laslo



Tilt T Laslo



Tweet Laslo



Pixel Laslo



Tsana Laslo



Tsana X Laslo



Clip Laslo



Zelda Laslo

LED Luminaires

Modern Streetfurniture

Waste bins

Bollards Light

tree grill

Bollards

Classic poles cast iron

Steel poles

MODERN POLES CAST IRON

Defence bollards

Drinkwater fountain

SEATING

TRAMWAY POLES

Modern LED luminaires

Classic luminaires

Classic street furniture

Ghm

Rue Antoine Durenne
52220 Sommevoire
France
Tel nr. 0033 3 25 55 23 03

ECLATEC

41 rue Lafayette
54320 Maxeville
France
Tel nr. 0033 3 83 39 38 28

Export internet : www.ghm-eclatec.com

Email export: info@ghm-eclatec.com