



Crosse Pico : en acier, Ø 60 mm


Fixation du luminaire en coiffant ou pénétrant standard Eclatec (cf p.132)

Fixation pénétrante de la crosse dans le mât


Finition : thermolaquage par poudrage polyester, couleur au choix

Mât : acier cylindro-conique Ø 60/62 mm


PICO	A mm	B mm	C mm	D mm	Inclinaison degrès	Poids kg	SCx m ²
Simple feu	800	390	-	-	5	7	0,07
	1000	400	-	-	5	8,25	0,07
	1200	410	-	-	5	9,15	0,11
Double feu	800	390	1600	-	5	11	0,12
	1000	400	2000	-	5	13	0,17
	1200	410	2400	-	5	15	0,20
Applique murale	500	175	-	210	5	1	0,03
Contre-feu	500	175	-	210	5	1	0,03

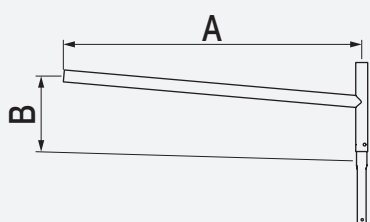


crosse Pico simple feu

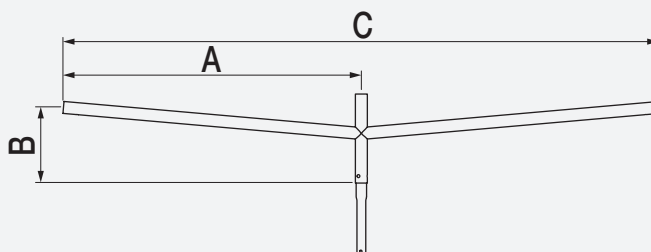

crosse Pico double feu

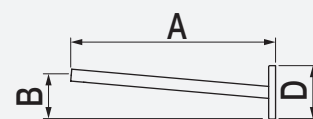

applique murale Pico

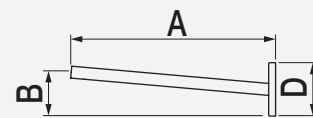

contre-feu Pico



Enza Pico



Elipt Pico



Ixis Pico



Moana Pico



Tsana Pico



Murena Pico



Enza Pico



Tilt T Pico



Pixel Pico



Indice Graphic Pico

LED Luminaires

Modern Streetfurniture

Waste bins

Bollards Light

tree grill

Bollards

Classic poles cast iron

Steel poles

MODERN POLES CAST IRON

Defence bollards

Drinkwater fountain

SEATING

TRAMWAY POLES

Modern LED luminaires

Classic luminaires

Classic street furniture

Ghm

Rue Antoine Durenne
52220 Sommevoire
France
Tel nr. 0033 3 25 55 23 03

ECLATEC

41 rue Lafayette
54320 Maxeville
France
Tel nr. 0033 3 83 39 38 28

Export internet : www.ghm-eclatec.com

Email export: info@ghm-eclatec.com